


TRECCE DI MASSA ROTONDE

ROUND GROUNDING STRIPS

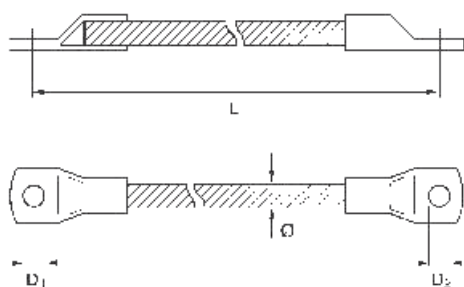

Treccia rotonda | Round braid

Rame rosso Red copper	Rame stagnato Tinned copper	Sezione mm ² Section	Ø Filo Wire dia.	L mm.	D ₁ mm.	D ₂ mm.	Ø mm.
COR 6/010 - 150/M6	COS 6/010 - 150/M6	6	0,10	150	6,4	6,4	4,0
COR 10/020 - 200/M6	COS 10/020 - 200/M6	10	0,20	200	6,4	6,4	5,0
COR 16/020 - 200/M8	COS 16/020 - 200/M8	16	0,20	200	8,4	8,4	6,6
COR 25/020 - 200/M8	COS 25/020 - 200/M8	25	0,20	200	8,4	8,4	7,6
COR 35/020 - 250/M10	COS 35/020 - 250/M10	35	0,20	250	10,5	10,5	9,5
COR 50/020 - 250/M10	COS 50/020 - 250/M10	50	0,20	250	10,5	10,5	11,5
COR 75/020 - 300/M12	COS 75/020 - 300/M12	75	0,20	300	13,2	13,2	13,7
COR 100/020 - 300/M12	COS 100/020 - 300/M12	100	0,20	300	13,2	13,2	16,0

Corda | Twisted cable (rope)

Rame rosso Red copper	Rame stagnato Tinned copper	Sezione mm ² Section	Ø Filo Wire dia.	L mm.	D ₁ mm.	D ₂ mm.	Ø mm.
CCR 10/010 - 200/M6	CCS 10/010 - 200/M6	10	0,10	200	6,4	6,4	5,0
CCR 16/010 - 200/M8	CCS 16/010 - 200/M8	16	0,10	200	8,4	8,4	6,6
CCR 25/010 - 200/M8	CCS 25/010 - 200/M8	25	0,10	200	8,4	8,4	7,6
CCR 35/010 - 250/M10	CCS 35/010 - 250/M10	35	0,10	250	10,5	10,5	9,5
CCR 50/010 - 250/M10	CCS 50/010 - 250/M10	50	0,10	250	10,5	10,5	11,5
CCR 75/010 - 300/M12	CCS 75/010 - 300/M12	75	0,10	300	13,2	13,2	13,7
CCR 100/020 - 350/M12	CCS 100/020 - 350/M12	100	0,20	350	13,2	13,2	16,0
CCR 120/020 - 350/M12	CCS 120/020 - 350/M12	120	0,20	350	13,2	13,2	17,5
CCR 150/020 - 350/M12	CCS 150/020 - 350/M12	150	0,20	350	13,2	13,2	19,0
CCR 200/020 - 400/M14	CCS 200/020 - 400/M14	200	0,20	400	15,0	15,0	24,0
CCR 240/020 - 400/M14	CCS 240/020 - 400/M14	240	0,20	400	15,0	15,0	26,0

Corde sottotreccia

Round stranded copper cables with overall copper braid

Rame rosso Red copper	Rame stagnato Tinned copper	Sezione mm ² Section	Ø Filo Wire dia.	L mm.	D ₁ mm.	D ₂ mm.	Ø mm.
CCR/CR 38/020 - 300/M8	CCS/CS 38/020 - 300/M8	38	0,20	300	8,4	8,4	9,5
CCR/CR 50/020 - 300/M8	CCS/CS 50/020 - 300/M8	50	0,20	300	8,4	8,4	11,5
CCR/CR 100/020 - 350/M10	CCS/CS 100/020 - 350/M10	100	0,20	350	10,5	10,5	16,0

Larghezze, lunghezze, sezioni e forature non comprese in tabella vengono allestite su richiesta.

ISOLAMENTO SPECIALE: pvc trasparente su richiesta.

Widths, lengths, sections and bores are not included in table above, they are provided at request.

SPECIAL INSULATION: transparent pvc-jacket are provided at request.